RE N2 W3 ASI B

REBLOC 80H_8

Technical Datasheet

REBLOC 80H_8



Precast Concrete Vehicle Restraint System

Permanent System Free standing

Technical data

Containment level	**N2**
Working width	**W3 (W_N ≤ 1.0 m)**
Impact severity level	**ASI B**
Installation	**free standing on asphalt | concrete | compacted soil**
Application	**single-sided | double-sided**
Minimum installation length	**80 m (10 elements) + initial/end anchorage**
Initial/end anchorage	**required (according to anchor chart 39-10501): e.g. REBLOC 80H_4T | 80H_7T or force closure**
Dimensions L x W x H in cm	**800 x 56 x 80 cm**
Weight/element	**approx. 4060 kg**
Curve radius	**r ≥ 225 m, smaller radii on request**
Coupling/exposed steel parts	**fully integrated, exposed parts hot-dip galvanized**
CE certification	✓

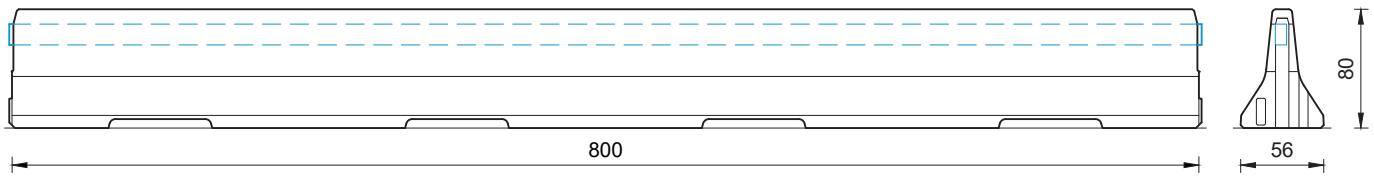

all dimensions in cm

Copyright and pictures: REBLOC, changes and misprints reserved.