RE L2 H2 W1 ASI B


REBLOC 80XAU_8_5A

Technical Datasheet

REBLOC 80XAU_8_5A


Precast Concrete Vehicle Restraint System

Permanent System Anchored

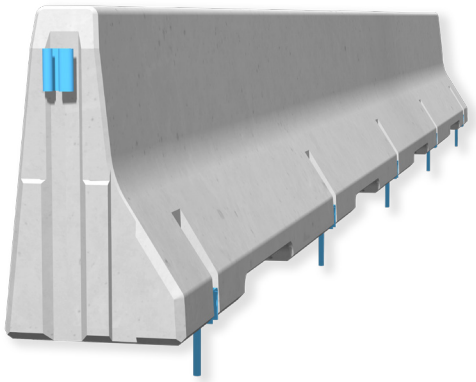

Technical data

Containment level	**L2 / H2**
Working width	**W1 (W_N ≤ 0.6 m)**
Impact severity level	**ASI B**
Vehicle intrusion	**VI2 (VI_N ≤ 0.8 m)**
Installation	**anchored (5 x M20 adhesive anchors in concrete per element)**
Application	**single-sided**
Minimum installation length	**56 m (7 elements)**
Initial/end anchorage	**not necessary, optional available**
Dimensions L x W x H in cm	**800 x 45 x 80 cm**
Weight/element	**approx. 4030 kg**
Curve radius	**r ≥ 235 m (outside of the curve)** **r ≥ 110 m (inside of the curve)**
Coupling/exposed steel parts	**fully integrated, exposed parts hot-dip galvanized**
CE certification	✓

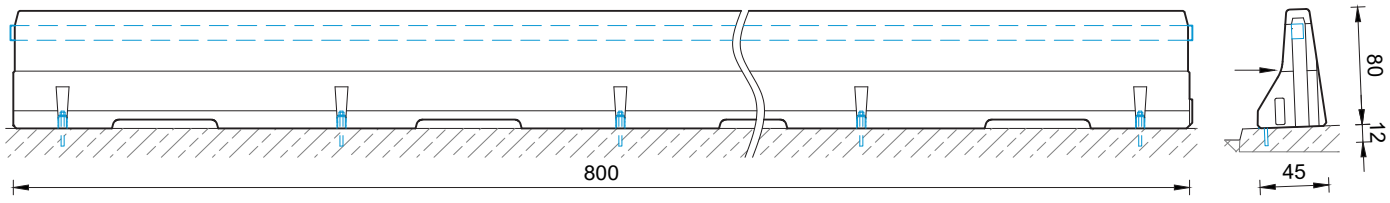

all dimensions in cm

Copyright and pictures: REBLOC, changes and misprints reserved.